Air King Ventilation Products®

SPECIFICATIONS

AK55L

EXHAUST FANS

1350 watts - 70 CFM/5.0 SONES @ 0.10" wg.
HVI CERTIFIED 120 Volts, 11.2 amps, 60 hz.

- **Grill**
  White, polymeric grill (flame retardant ABS UL rated 94-5V) secured in place using 2 hex nuts that can be easily removed if necessary, dimensions - 17 1/8" x 9 7/8".
- **Light Lens**
  Moonstone glass lens, installed in a flip down lens holder. Secured in place using integral tabs.
- **Blower Wheels**
  Heater blower wheel - one piece metal electronically balanced, 3 11/16" x 2" with 28 fins.
  Ventilation blower wheel - one piece polymeric electronically balanced, 4 5/8" x 1" with 10 fins.
- **Motors**
  Heater motor - Heavy duty, plug in 2 pole motor. Life time lubrication, thermally protected. Rated 120 volts, 60 hz., 0.90 amps., 2400 rpm.
  Ventilation motor - Heavy duty, plug in 2 pole motor. Life time lubrication, thermally protected. Rated 120 volts, 60 hz., 1.2 amps.
- **Heater Housing**
  23 gauge galvanized steel housing. Dimensions 14 1/2" x 8 3/8" x 6 1/2".
- **Heating Element**
  Ultra safe ceramic heating element bonded to large heat transfer surface allows heating at very low operating temperature. Self regulating design provides 1,350 Watts – 4,600 Btu.
- **Duct Collar**
  4" round, zinc plated metal collar adapter with aluminum backdraft damper.

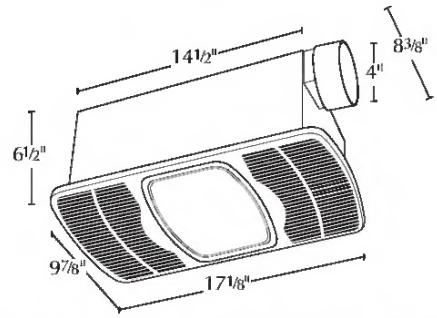

CUL/HVI - TYPE IC RATED

- **Ventilating Area**
  For bathrooms up to 70 sq. ft. For other rooms up to 85 sq. ft.
- **Lamping Information**
  Up to 100 watt incandescent capacity, type A lamp required.
- **Unit Mounting**
  Designed for ceilings insulated to R-40. Designed to mount in ceilings with at least 7.5" of clearance. The unit will mount between joists (with 16" centers) or butted up against a joist. The housing will mount through drywall thickness up to 3/4", with a rough in opening of 14 3/4" x 8 5/8".
- **Single Pack Shipping Info**
  Box Dim: 21 1/8" x 11 1/4" x 9 3/4"
  UPC: 0-83162901002
  Shipping Weight: 16.09 lbs.

PERFORMANCE

	Static Pressure (inches of w.g.)								*HVI Sones @ .1 SP*	*Fan Speed RPM*	*Power Watts*
	0	0.05	0.1	0.15	0.2	0.25	0.3	0.35			
Air Flow - CFM	76	73	70	67	64	61	57	53	5.0	2575	54

PROJECT		ARCHITECT		
LOCATION		ENGINEER		
CONTRACTOR		SUBMITTED BY		DATE

FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL us

2100 HVI CERTIFIED™

U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (877)-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015

Downloaded from www.Manualslib.com manuals search engine